

+1 (773) 376-9660 / www.warcopro.com / www.usglobalpetroleum.com

WARCO Type A Automatic Transmission Fluid is an economical fluid blended from quality base oils for use in older American, European, and Asian automobile and light truck automatic transmissions, hydraulic systems and power steering units requiring Type A Fluid and/or where fluid leakage and high consumption is a problem. WARCO Type A ATF is dyed red to aid in leak detection. It is an excellent top-off fluid that blends well with original transmission fluids, but is not recommended for complete fluid changes.

*Type-A ATF fluids are not recommended for use where DEXRON® or MERCON® fluids are specified.

Approvals, Applications and Benefits

- · Additives for smooth shifting
- Fights rust and corrosion
- Dyed red for leak protection


Typical Characteristics - Type A

GRADE	Test Method	TYPE A
Color	Visual	Red
Viscosity @ 100°C, cSt	ASTM D445	7.2
Viscosity @ 40°C, cSt	ASTM D445	36.0
Viscosity Index	ASTM D2270	150
Pour Point, °C/°F	ASTM D97	-40 / -38.2
Flash Point, COC °C/°F	ASTM D92	160 / 320
API Gravity	ASTM D287	31.4
Specific Gravity @ 15.6/ 15.6°C	ASTM D4052	-

Test Method ASTM - Typical test data are average values only. Minor variations, which do not affect performance, may occur.

Suitable for: Older Automatic Transmission



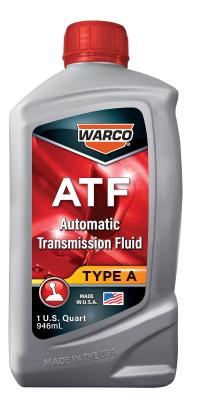

V220127

HANDLING AND SAFETY INFORMATION - Refer to WARCO (SDS) Safety Data Sheets for proper handling and safety information. Use the same care and handling as for any petroleum product. Nothing herein shall be deemed to constitute a warranty, express or implied, that said information or data are correct or that the products described are merchantable or fit for a particular purpose, or that said information, data or products can be used without infringing patents of third parties.